



**3.6V**  
**Size:2/3AA**

**Lithium Thionyl  
Chloride Battery**



**ERI4335M**

## SPECIFICATIONS

(Typical data from the batteries stored at 25+5°C for 12 months)

**Nominal Capacity** (1.0mA ~ 2V) : **1.3Ah**

(At 1.0mA, +25°C cut-off voltage 2.0V.)

**Rated Voltage:** **3.6V**

**Max Constant Current of Discharge:** **200mA**

**Max Discharge Current** (Pulse) : **500mA**

**Operating Temperature Range:** **-60°C ~ +85°C**

(exceeding the operating temperature range can result in reduced capacity, low voltage reading and low initial pulse voltage reading.)

## PHYSICAL PROPERTIES

**Diameter (max.):** **14.5mm**

**Height (Max.):** **33.5mm**

**Typical Weight:** **15g**

## S: STANDARD TERMINATION

### Notes:

Dimension:mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins

### Important Notes:

Do not short or charge the battery.

Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

## ADVANTAGES

Stable high operating voltage and high capacitance

High energy density, high stable current

Wide operating temperature ranges (-60°C ~ +85°C)

Low self-discharge rate (annual self-discharge rate is less than 1% at +25°C)

Excellent environmental application characteristics

Stainless steel case (low magnetic resistance to environmental erosion)

## FEATURES

A positive structure with proprietary technology

Stainless steel - glass airtight package

Non-combustible electrolyte

High short circuit safety


Comply with GB 8897.4-2008 technical requirements

Meet technical requirements of IEC60086.4:2014

**Warning:** Do not charge, short circuit, heat more than 85°C, decompose, put into water, directly in the battery shell surface welding, otherwise may cause explosion, combustion and internal acid leakage of the battery.

# ERI4335M

**Size: 2/3AA 3.6V**  
**Lithium Thionyl Chloride Battery**

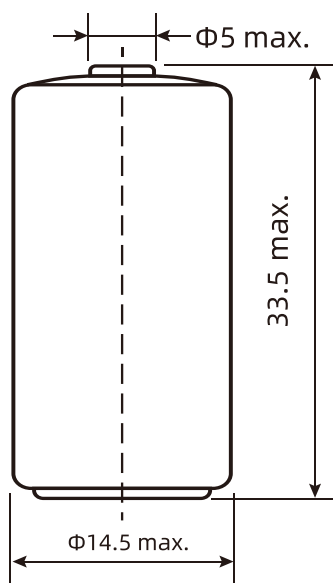

## Size unit :mm

(GB1804-m if tolerance is not specified)  
For special connection requests, please consult POWERSTABILITY


## WARNING

- Do not short out the battery
- Do not charge the battery
- Don't pin the batter
- Do not squeeze the battery
- Pay attention to the battery anode and cathode
- Electrical equipment connection is correct
- Do not disassemble the battery
- Do not burn batteries
- Do not mix old and new batteries
- Do not heat the battery to more than 85°C
- Do not directly weld the battery
- Please use a battery with pre-welded pins or wires.


## Notice:

POWER STABILITY reserves the right to change the information contained in this data sheet without prior notice. Any performance parameters mentioned in this file are for reference only, and the contents of this document can be used as valid contract data only after written confirmation by both parties.

## 1. Discharge performance (+25 °C)

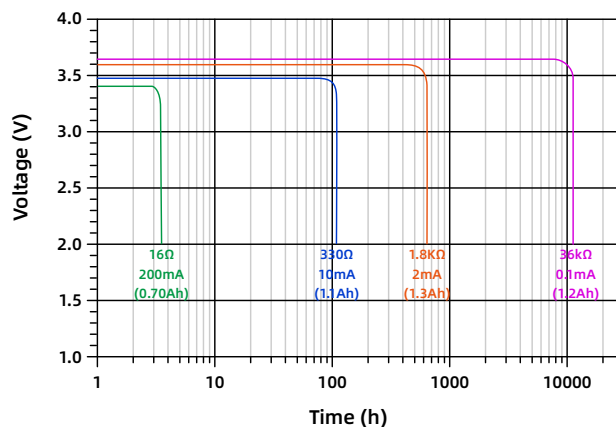

## 2. The relationship between voltage and temperature

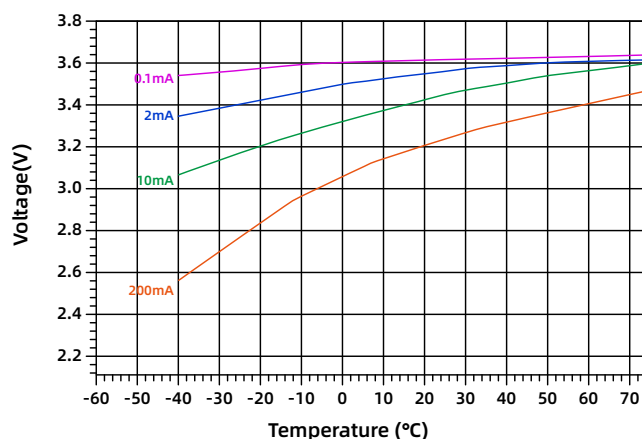

## 3. The relationship between capacity and current

